



ENVIRONMENTAL TECHNOLOGY

## FI-DSNM-R™ Non-Metallic Cartridge Seal to Suit Richter Pumps




- SUITS PCK & SCK RICHTER PUMP TYPES
- NON-METALLIC WETTED PARTS
- EASY TO INSTALL
- PATENT PENDING PUMPING SCROLL
- TRUE CARTRIDGE DESIGN
- ELIMINATES OEM CERAMIC SLEEVE


# FI-DSNM-R™ - technical information

The AESSEAL® FI-DSNM-R™ is a Patent Pending seal design offered to suit Richter PCK and SCK process pumps.


The FI-DSNM-R™ seal fits directly on to the bare shaft of the pump, eliminating the OEM ceramic shaft sleeve. The seal is offered with non-metallic wetted components and installs as a TRUE CARTRIDGE seal, with an integral axial compensating device designed to cater for any impeller to housing dimensional deviations.



The integral barrier fluid pumping ring is complimented by large 3/8" NPT ports and a deflector which guides the barrier fluid to the inboard and outboard seal faces. This helps to efficiently remove heat at the seal faces.



The FI-DSNM-R™ is available with an AESSEAL® LinerGuard™. AESSEAL® recommend that this is used to prevent damage to the pump backplate liner.

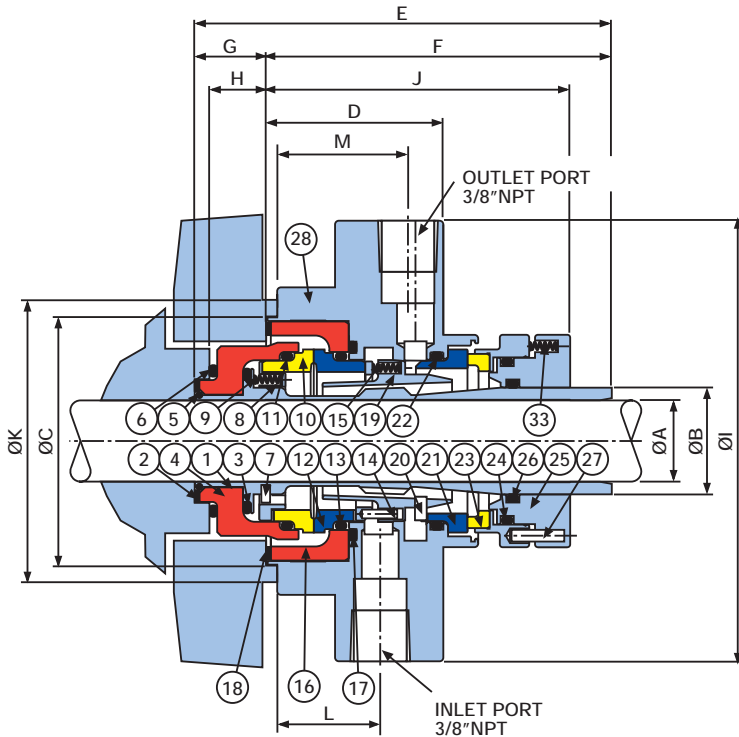

Item	Description	Material	Item	Description	Material
1	Sleeve	316L SS	18	Gasket	GFT
2	Sleeve Gasket	GFT	19	Deflector	316L SS
3	Sleeve O Ring	Viton® / EPR / Kalrez® / Aflas®	20	Drive Pins (Part of Deflector)	Stainless Steel
4	Sleeve End Cap	SiC	21	External Stationary Face	SiC / TC / 316L SS-Ch.Ox. / Ceramic
5	End Cap Retaining Ring	Stainless Steel	22	External Stationary O Ring	Viton® / EPR / Kalrez® / Aflas®
6	End Cap O Ring	Viton® / EPR / Kalrez® / Aflas®	23	External Rotary Face	316L SS - Carbon / TC / SiC
7	End Cap Drive Pins (Part of Sleeve)	Stainless Steel	24	External Rotary O Ring	Viton® / EPR / Kalrez® / Aflas®
8	Spring Plate	316L SS	25	Clamp Ring	316L SS
9	Springs	Hastelloy® C	26	Clamp O Ring	Viton® / EPR / Kalrez® / Aflas®
10	Inboard Rotary Face	SiC	27	Drive Pins (Part of Clamp Ring)	Stainless Steel
11	Inboard Rotary O Ring	Viton® / EPR / Kalrez® / Aflas®	28	Gland	316 SS
12	Inboard Stationary Face	SiC / Carbon	29	Anti-Tamper Screws	Stainless Steel
13	Inboard Stationary O Ring	Viton® / EPR / Kalrez® / Aflas®	30	Drive Screws	Stainless Steel
14	Spring Plate	316L SS	31	Setting Clips	Metal
15	Springs	Hastelloy® C	32	Clip Screws	Stainless Steel
16	Gland Insert	SiC	33	Springs	Hastelloy® C
17	Gland Insert O Ring	Viton® / EPR / Kalrez® / Aflas®			

Ø of OEM Sleeve	Ø A	Ø B	Ø C	D	E	F	G	H	Bolt Circle Ø	Ø I	Max Bolt Ø	J	Ø K	L	M
33.0mm	22.00	28.91	67.50	48.01	113.00	93.65	19.35	15.35	102.00	108.97	M8	82.38	76.50	27.91	35.43
43.0mm	32.00	41.27	84.00	56.43	113.00	93.65	19.35	15.35	120.00	130.00	M10	83.39	95.00	42.16*	45.63*

Dimensions in mm

\*Distance to centreline of angled port at 45° from horizontal plane.

THIS DOCUMENT IS DESIGNED TO PROVIDE DIMENSIONAL INFORMATION AND AN INDICATION OF AVAILABILITY. FOR FURTHER INFORMATION AND SAFE OPERATING LIMITS CONTACT OUR TECHNICAL SPECIALISTS AT THE LOCATIONS BELOW.



USE DOUBLE MECHANICAL SEALS WITH HAZARDOUS PRODUCTS. ALWAYS TAKE SAFETY PRECAUTIONS:

- GUARD YOUR EQUIPMENT
- WEAR PROTECTIVE CLOTHING



## UK Sales & Technical advice:

AESSEAL plc  
Mill Close  
Templeborough  
Rotherham  
S60 1BZ  
United Kingdom

Telephone: +44 (0) 1709 369966  
Fax: +44 (0) 1709 720788  
E-mail: [seals@aes seal.com](mailto:seals@aes seal.com)  
Internet: <http://www.aes seal.com>

Distributed by:

**Our Purpose:** 'To give our customers such exceptional service that they need never consider alternative sources of supply.'

## USA Sales & Technical advice:

AESSEAL Inc.  
355 Dunavant Drive  
Rockford  
TN. 37853  
USA

Telephone: +1 865 531 0192  
Fax: +1 865 531 0571  
E-mail: [usa@aes seal.com](mailto:usa@aes seal.com)