





LabTecta-IAP™ LabTecta-OAP™

PATENT PENDING in over 39 countries.






"Engineered Solutions with Positive Air Purge"

LabTecta-OAP™ - Outboard Air Purge



The LabTecta-OAP™ is specifically designed for use in extreme environments and applications where contamination may completely cover the seal. It will ensure that no contamination can enter the seal and the housing. The OAP uses a positive air purge to enhance the performance of the labyrinth. Its unique design utilizes mechanical seal pressure balancing technology to maximize the performance of the seal and minimize air consumption.

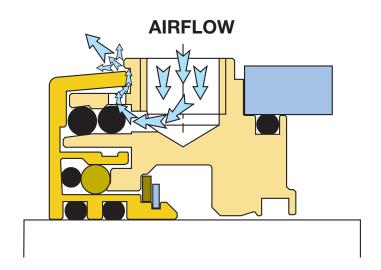




LabTecta-IAP™ and LabTecta-OAP™

- Eliminate maintenance and wearing parts
- Prevent contamination across the seal
- . Maximize reliability with no heat generation, vibration or lubrication

Installation made easy

Installation with either the IAP or OAP design is made easy by designing the seal to suit your specific equipment. AESSEAL® has multiple options including flange mount, pillowblock mount (show below right) or a standard press in mount (shown above left and right).






LabTecta-OAP™ design to suit pillowblock applications.


Sealing applications covered with powder or slurry are challenging for any standard bearing seal. The LabTecta-OAP™ is specifically designed for this environment ensuring no contamination can enter the seal and compromise its performance.

LabTecta-IAP™ - Inboard Air Purge



The LabTecta-IAPTM design is ideal for applications where it is necessary to retain product, gases or exhaust within an enclosure. Common applications are fans, screw conveyors and other powder handling equipment. The IAP uses labyrinth technology to direct the air purge inboard preventing the product being sealed from entering the seal and escaping to the environment.

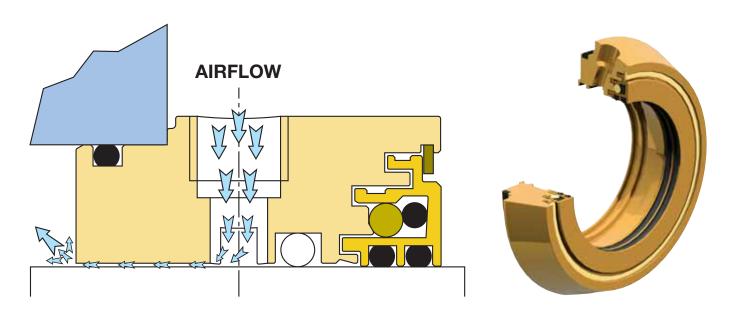


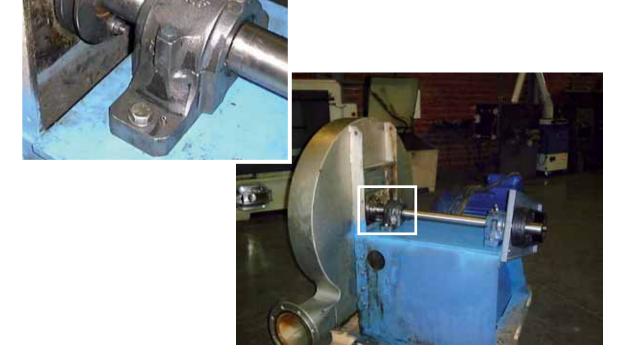

Sealing fan housings is made easy with the LabTecta-IAP $^{\text{TM}}$. The positive air purge will contain any emissions or contamination that tries to escape. With no contacting parts during operation, there is no vibration and no maintenance required.

LabTecta-IAP™ & LabTecta-OAP™ - Designed for your equipment

Sketch Housing Dimensions

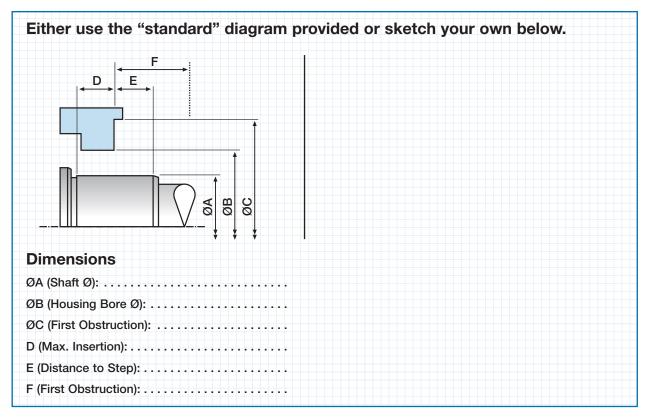

Application Data:

Equipment Type:	Shaft Horizontal or Vertical:
Speed:	Bearing Type:
Lubrication Type/System:	Max. Axial Movement:

Complete the information above and send to:

Further information about the AESSEAL® LabTecta™ range is available in the standard LabTecta™ brochure. E-mail sales@labtecta.com to request a copy or download it from our website - www.labtecta.com

THIS DOCUMENT IS DESIGNED TO PROVIDE DIMENSIONAL INFORMATION AND AN INDICATION OF AVAILABILITY.
FOR FURTHER INFORMATION AND SAFE OPERATING LIMITS CONTACT OUR TECHNICAL SPECIALISTS AT THE LOCATIONS BELOW.















USE DOUBLE MECHANICAL SEALS WITH HAZARDOUS PRODUCTS. ALWAYS TAKE SAFETY PRECAUTIONS:







UK Sales & Technical advice:
AESSEAL plc

Mill Close Templeborough Rotherham S60 1BZ United Kingdom

Telephone:

Fax:

E-mail:

Internet:



+44 (0) 1709 369966 +44 (0) 1709 720788 seals@aesseal.com http://www.aesseal.com Distributed by:

Our Purpose: 'To give our customers such exceptional service that they need never consider alternative sources of supply.'

USA
Telephone: +1 865 531 0192

355 Dunavant Drive

AESSEAL Inc.

Rockford,

TN. 37853

Fax: +1 865 531 0571 E-mail: usa@aesseal.com

USA Sales & Technical advice:

ALL SIZES ARE SUBJECT TO MANUFACTURING TOLERANCES. WE RESERVE THE RIGHT TO MODIFY SPECIFICATIONS AT ANY TIME.